




























# NEW GENERATION HIGH FLOW & COMPACT 3/2-Way Universal 53 Series Valve Designed for IS Machinery with Innovative 3-Position Manual Override

## TECHNICAL DATA


Fluid:	Compressed air, vacuum, inert gases
Pressure range:	External pilot 0 to 8 bar / 0 to 120 PSI
Pilot pressure:	2,5 to 8 bar / 37.5 to 120 PSI
	Not required if used select a medium aniline point lubricant (between 80°C and 100°C / 176°F and 212°F)
	40 µ
Temperature:	-18°C to + 80°C / 0°F to 176°F
	8,5 mm / 0.31 in
	2000 NI/min - Cv 2.0
Coil:	
Voltage range:	-15% to +10% of nominal voltage
MOD. ER05:	Viton seals, spool and poppet - High temperature grease - Glass industry manual override design

## MAC SOLUTION - HOW TO ORDER

NC Valve:	
NO Valve:	
Valve repair kit:	
Pilot repair kit:	

## MAC 53 SERIES - CONFIGURATION POSSIBILITIES

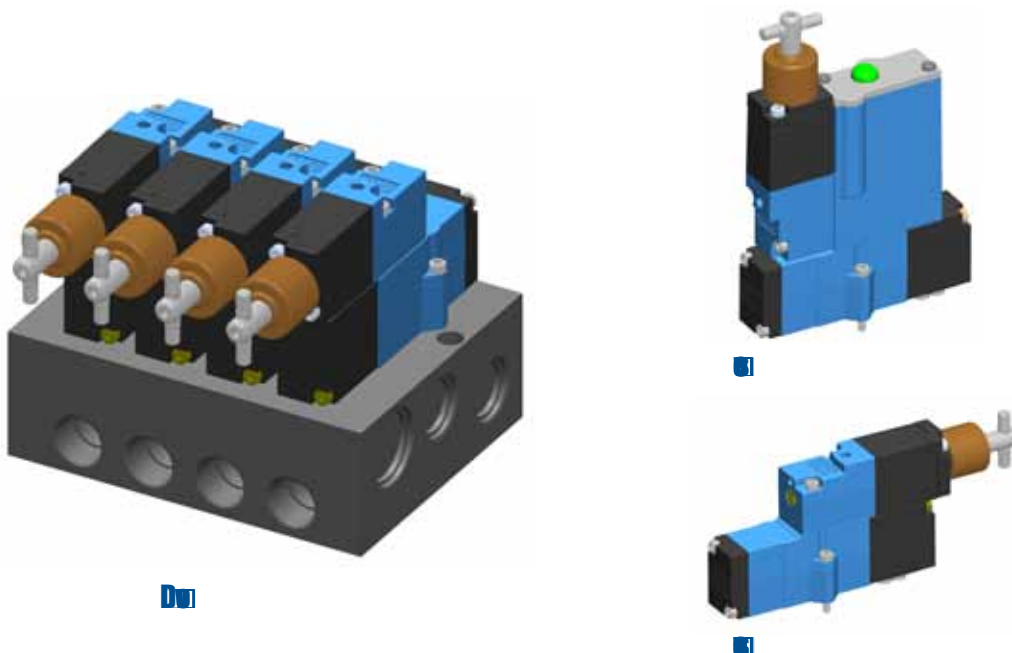

MAC Valves Inc, Wixom, Michigan - MAC Valves Inc, Dundee, Michigan  
MAC Valves Europe Inc, Liège, Belgium - MAC Valves Asia Inc, Taiwan

To find your *local* distributor, visit [www.macvalves.com](http://www.macvalves.com)

